

ACCURATE AND CONSISTENT PERFORMANCE

The Squid UV LED Curing System from Squid Ink offers accurate and consistent UV curing across a variety of commercial and industrial applications. Whether you need to cure ink on metal, glass, automotive products, plastics, electronics and more, you're sure to find the right solution with Squid Ink's new UV Curing System.

HIGH CURING QUALITY

Squid UV is capable of curing inks in a 20mm x 80mm area from a single illumination module that can be doubled to cure an area of 40mm x 80mm or 20mm x 160mm with the addition of a second system. The system features an advanced LED module to provide consistent luminance, resulting in a reliably cured product, every time. The stability of UV LED technology makes the output of electricity predictable and stable, avoiding problems associated with conventional halogen heat lamp drying.

LOW RUNNING COST

UV LED technology provides a stable and efficient way of curing CIJ, Piezo, and Thermal inkjet inks. The integrated super cooling system considerably lowers the unit's operating temperature to extend the life of the machinery while reducing maintenance costs. The use of UV LED curing results in a significant savings in power reduction, and time and money spent replacing lamps becomes obsolete due to the 20,000+ hour illumination runtime. For comparison, Squid UV curing systems use about 75% less energy than typical UV arc lamp curing.

ENGINEERED DURABILITY

Our UV system is designed to meet the harsh demands of your application. You can be confident that Squid UV's rugged design will withstand the most abusive industrial environments while providing superior quality UV curing. For ease of use and integration, Squid UV mounts directly to your existing manufacturing line and requires no need for preheating. The system is programmed with an easy-to-use color touchscreen and can be programmed to run in manual or automatic mode to match the operation of your manufacturing line. For quick startup, Squid UV's fast response functionality means that the system can be powered on and ready to go at an instant, eliminating downtime and increasing your ROI.


THE UV ADVANTAGE

As a new addition to Squid Ink's growing family of industrial equipment offerings, Squid UV gives users more solutions for their coding applications. In addition, UV LED curing systems are clean and efficient, improve print quality due to immediate dry time, help to increase production rates, and require little space on production lines. Any way you look at it, Squid UV curing systems provide significant benefits to your manufacturing process.

THE RIGHT SOLUTION

Rugged design. Low maintenance operation. Low cost of ownership. Your benefits go on an on. When it comes to your UV curing needs, rely on Squid Ink to provide the right solution for your industrial and commercial applications.



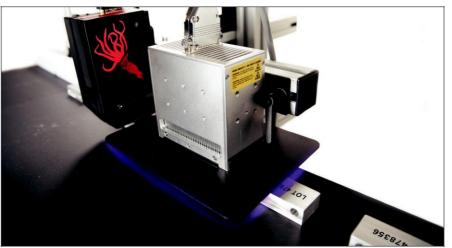






2) Standard bracketry allows Squid UV LED to mount directly to your existing manufacturing line.









3) Squid UV LED provides reliable curing on coated cartons, plastics, metals, foils, film, rubber, and more.

4) Adjustments are easily made with the simple-to-use touchscreen interface.

| System Specifications | | | |
|---------------------------------|---|-----------|--|
| Wave Length | | 395 ± 5nm | |
| Irradiancy | | 12W/cm² | |
| Effective Illumination Area | Single head 20mm x 80mm | | *Dual head 40mm x 80mm or 20mm x 160mm |
| Recommended Illumination Height | 1.5 - 10mm from substrate | | |
| Production Line Dry Time | Up to 40m /min depending on substrate | | |
| Control Modes | Manual or Automatic | | |
| Controller Dimensions | 12.5" x 9" x 5" 32cm x 23cm x 13cm | | |
| Illuminating Head Dimensions | 4.7" x 2.6" x 4.7" 12cm x 7cm x 12cm | | |
| Lamp Shield Dimensions | Single head 9" x 6.7" 23cm x 17cm | | *Dual head 9" x 9.3" 23cm x 24cm |
| Illuminant Output Control | 10% - 100% | | |
| Power Supply | 90 - 220V AC 50/60Hz 300W | | |
| LED Lifetime | 20,000 hours or more | | |
| Working Enviroment | 14°F - 131°F | | |
| Storage Enviroment | | 13°F - | · 185°F |

^{*}Dual head setup requires 1 controller per illuminating head

©2016 Squid Ink Manufacturing, Inc. Specifications subject to change. All trademarks are the property of their registered owners.



